



COMROD AM/FM60-BI

8' Marine AM/FM An-

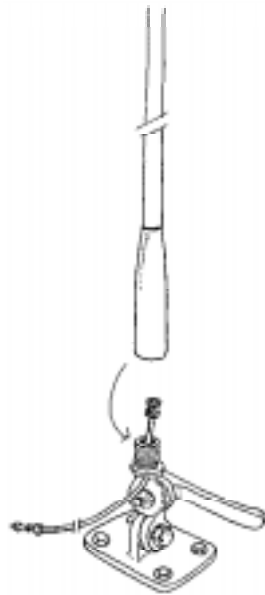

Application:

The AM/FM60-BI is broadcast receiving antenna. It is designed for use on pleasure craft, but the high quality means it may be installed on all kinds of vessels.

It comes with integrated BNC coaxial connector.

Electrical specifications:

Frequency range	0.15 – 108 MHz,
Nominal impedance	75 ohm
Power rating	Receiving antenna
Polarisation	Vertical
Connector	BNC female.
DC-grounded	Yes

Mechanical specifications:

Design	Whip with transformer. Radiating element completely
Height	8' (2,45 m.)
Weight	1.1 kg
Wind rating	55 m/s = 125 mph
Finish	Polyurethane lacquer, white
Temperature range	-55 °C, +71 °C; -67 °F, +160°F

Mounting:

The AMFM60-BI is fitted with UNS1"x14 female ferrules. Can be used with all standard mounting accessories.

Integrated BNC female coaxial connector.

All BI versions come with a tool to mount the BNC male coaxial connector inside the stainless steel ferrule.


4-way bracket and coaxial cable not included

UNS: Unifield Special


Accessories: (optional extra)

RG58 Cable.

Available in:
40ft 12m.
23ft 7m.
16ft 5m.
2ft 0,6m.

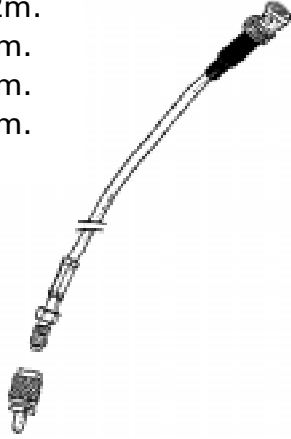

4 way bracket.

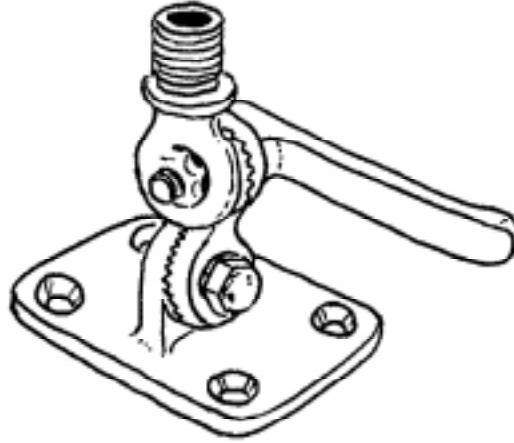

Extension
Masts.

